


ALUFIX® - Self-adhesive foils

ALUFIX® - Self-adhesive foils in 4 quality levels

- ⊙ ALUFIX®-self-adhesive foils made of pure aluminium
- ⊙ ALUFIX®-aluminized plastic tape
- ⊙ AWX – All-Weather-Quality
- ⊙ AWX – All-Weather-Quality reinforced with scrim

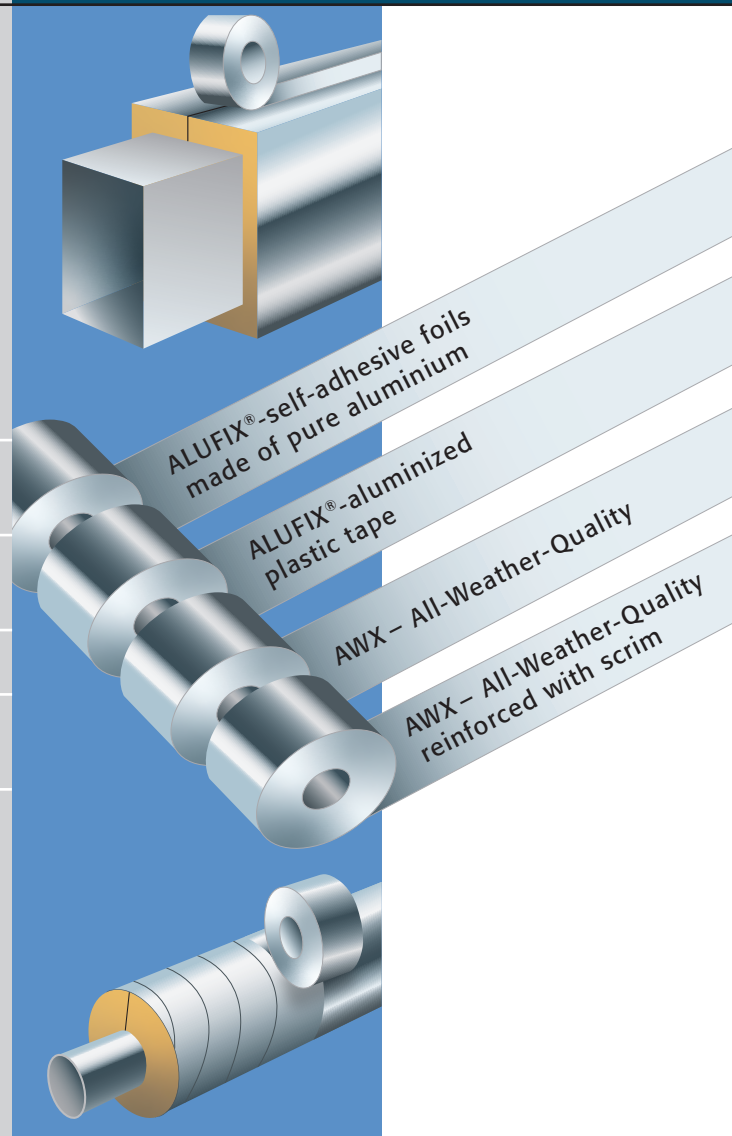

ALUFIX® self-adhesive foils are ideal for steam and airtight masking of aluminium moisture barriers and aluminium laminated insulating materials.

In many applications, such as e. g. production of sauna or in the insulation, from industrial installations and air-conditioning ducts located **ALUFIX® self-adhesive foils** have proven to be a safe seam bonding of vapour barriers.

ALUFIX® self-adhesive foils have a good adhesion on all smooth and stable surfaces. They are particularly suitable for masking of aluminium vapour barriers. The adherent surfaces must be dry, grease-free and largely free of dust. The bands are to rub firmly and without bubbles.

ALUFIX® self-adhesive foils are available in the following 4 grades:

• **ALUFIX® self-adhesive foils made of pure aluminium**

These also meet fire safety requirements (Fire performance DIN 4102 B1, hardly inflammable)

Thickness of aluminium: 0,030 mm

Art. no.	width	length
17040	50 mm	50 m
17042	75 mm	50 m
17044	100 mm	50 m
17046	500 mm	50 m
17048	1.000 mm	50 m



Joint bonding of aluminium-laminated panels

Thickness of aluminium: 0,050 mm

Art. no.	width	length
17060	50 mm	50 m
17062	75 mm	50 m
17064	100 mm	50 m
17066	500 mm	50 m
17068	1.000 mm	50 m

Thickness of aluminium: 0,100 mm

Art. no.	width	length
17080	50 mm	50 m
17082	75 mm	50 m
17084	100 mm	50 m
17086	500 mm	50 m
17088	1.000 mm	50 m

• **ALUFIX® aluminized plastic tape**

This is characterized above all by an excellent tensile strength. A property that is particularly important in helical wrapping of pipe or climatic insulations.

Aluminized overall thickness 0,050 mm

Art. no.	width	length
17150	50 mm	50 m
17154	100 mm	50 m

• **AWX All-Weather-Quality**

Aluminum self-adhesive tape with excellent adhesion to metallic or condensate-carrying surfaces. Can be processed at frost and temperatures down to -25 °C.



Joint bonding of the TECHNONORM vapour barrier

Heat resistant until +130 °C, Fire performance DIN 4102 B1, hardly inflammable.

Thickness of aluminium: 0,030 mm

Art. no.	width	length
17055	50 mm	50 m
17056	75 mm	50 m
17057	100 mm	50 m

• **AWX – All-Weather-Quality reinforced with scrim**

This aluminium tape has the same features and benefits of the AWX – All Weather-Quality, in addition, with the advantage of a particularly high stability thanks to the scrim reinforcement.

Thickness of aluminium: 0,030 mm

Art. no.	width	length
17050	50 mm	50 m



Fixation of pipe insulation

... more interesting products from KORFF

⊙ **UNIVERSAL-Flex Pipes**

from pure aluminium, one layer and two layer, effective length 2,5 m and 5 m

⊙ **Aluminium vapour barrier**

pure aluminium, reinforced, Rough grain, PE-laminated a.s.o.

⊙ **UNIVERSAL-Repair tape**

Flexible sealing strip of elastomeric Bitumen-coated aluminium foil

Please provide us with

- Free advice about ALUFIX® self-adhesive foils
- Samples and price information
- Additional information

KORFF AG
Niedermattstrasse 35
CH-4538 Oberbipp BE

Phone +41(0)32 636 33 32
Fax +41(0)32 636 23 09
info@korff.ch | www.korff.ch